




IronFlex Horseshoe Bollard—3” (SS3Y-36-HS-36)




Color: RAL 1023 Safety Yellow Bollard
RAL 9005 Black Base

Diameter: 3” (2.5” ANSI Schedule 40 or Equiv.)
Height: 36”
Width: 36”

Set Screws: M12 x 2.00mm Hex



Installs with eight (8)
5/8” x 4”
Concrete Anchor Screws

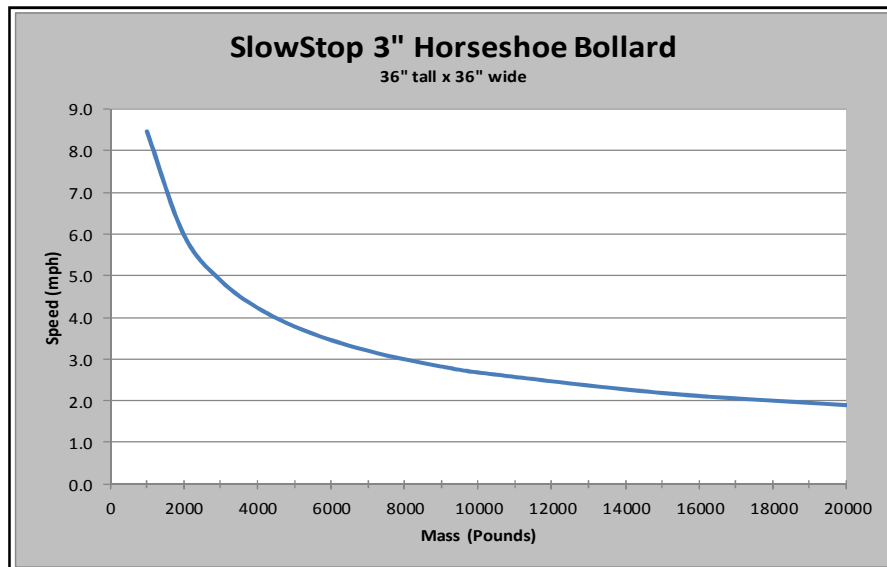

SPECIFICATIONS

- Energy Absorption: 3,240 joules / 2,390 ft-lb.
- Temperature Rating: -40°
- Pipe Coating: 60µm Hot Dipped Galvanized + 60µm Polyester Outdoor Powder Coat
- Cast Iron Coating: Environmentally Friendly Water-Based KTL Coating + Powder Coat C5I Rated

RECOMMENDED USES

- Light Duty Column Protection
- Parking Garages
- Pedestrian Protection
- Rack and Equipment Guarding
- Access Denial
- Post-tensioned Concrete



4955 Stout Dr. • San Antonio, TX 78219
210-736-4477 • 800-736-5256 • Fax 210-734-6448
Email: info@impactrecovery.com
www.slowstop.com



