





# SlowStop® Rebounding Bollard – 3” (SS3Y-42)

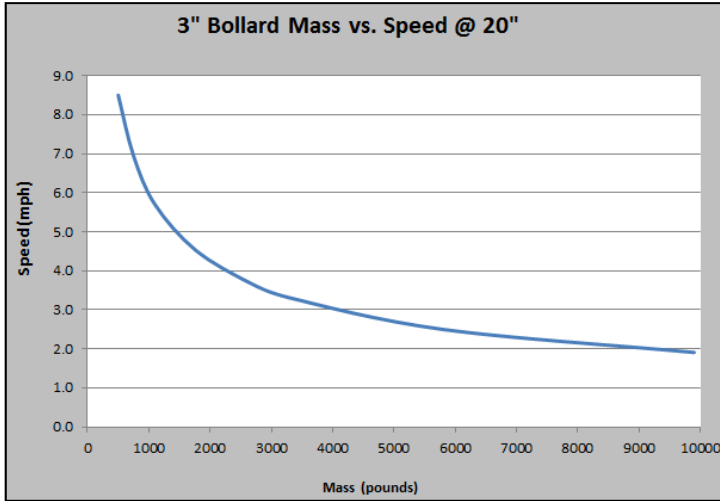

Installs with four (4)  
5/8" x 4"  
Concrete Screw Anchors



- Color: RAL 1023 Safety Yellow Bollard  
RAL 9005 Black Base
- Diameter: 2.88" (2.5" ANSI Schedule 40)
- Height: 42"
- Set Screws: 5 M12 x 1.75  
6mm Hex
- Cap: Black Plastic

### SPECIFICATIONS

- Energy Absorption: 1,621 joules / 1,195 ft-lb.
- Temperature Rating: -40°
- Pipe Coating: 60µm Hot Dipped Galvanized +  
60µm Polyester Outdoor Powder Coat
- Cast Iron Coating: Environmentally Friendly Water-Based KTL Coating + Powder Coat C5I Rated.

### RECOMMENDED USES

- Light Duty
- Rack Guarding
- Equipment Guarding
- Drive-Thru Lanes
- Utility Protection
- Access Denial
- Post-Tensioned Concrete
- Not for K-Rated Security Use



4955 Stout Dr. • San Antonio, TX 78219  
210-736-4477 • 800-736-5256 • Fax 210-734-6448  
Email: [info@impactrecovery.com](mailto:info@impactrecovery.com)  
[www.slowstop.com](http://www.slowstop.com)



QR: Download Spec Sheets  
©2017 SlowStop. All rights reserved.





