





SlowStop® FlexRail—4m (SSRY-4)

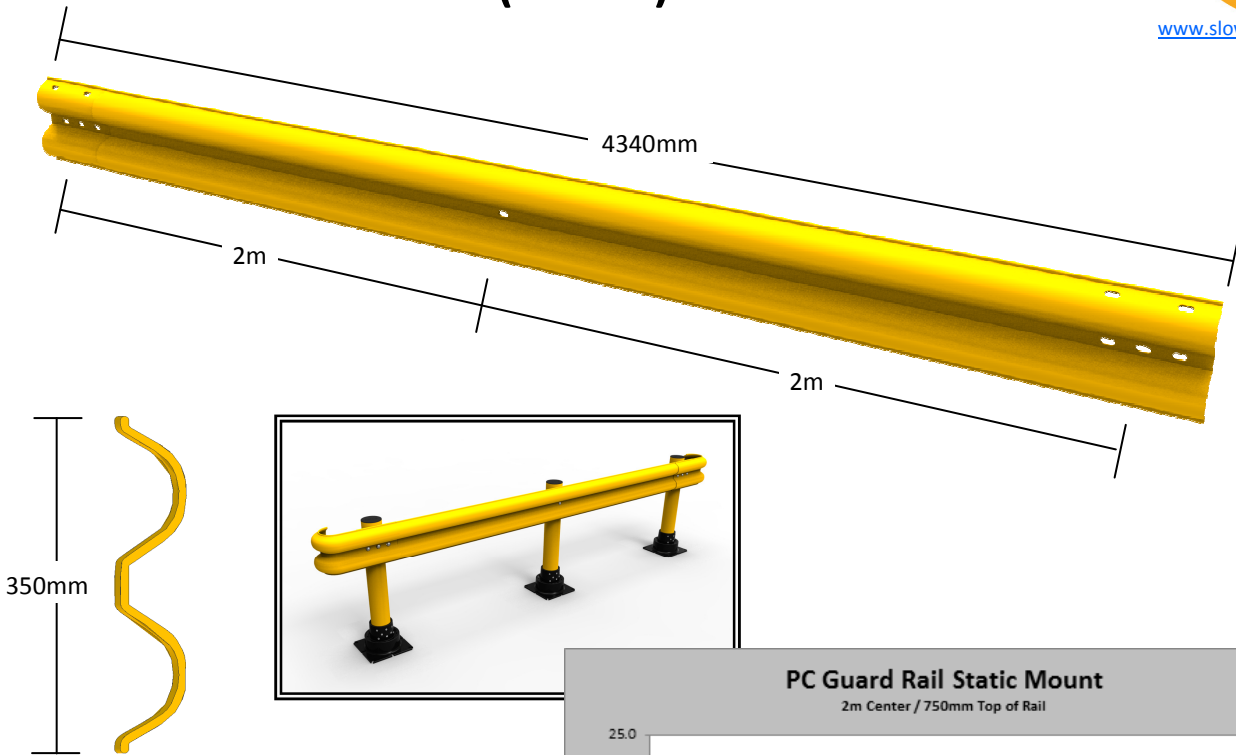

End Caps Available
P/N: SSEY

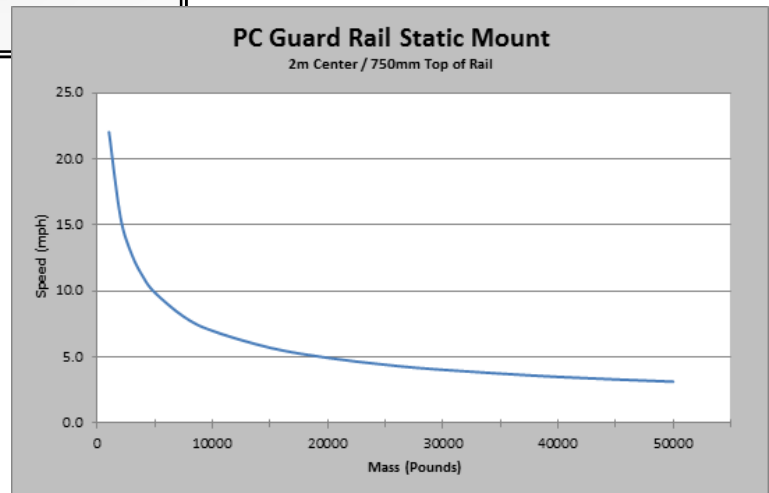

SPECIFICATIONS

- Break Strength: 24,780 lbf
- 22,021 Joules (static mount)
- Max deflection: 21" (static mount)
- Temperature Rating: -40°F to 240°F
- Traffic Yellow (RAL 1023)
- Weight: 40 pounds (approx. 25% compared to steel)
- No bending equipment required for curves

RECOMMENDED USES

- Mount to SlowStop® Rebounding Bollards for increased strength.
- Industrial Equipment Protection
- Pedestrian Aisle Ways
- Utility Guarding
- Access Denial
- Parking Perimeters



4955 Stout Dr. • San Antonio, TX 78219
210-736-4477 • 800-736-5256 • Fax 210-734-6448
Email: info@slowstop.com
www.slowstop.com



QR: Download Spec Sheets
©2017 SlowStop. All rights reserved.